

### 1 - CONSTRUCTION

- Hollow and flat E glass yarn braid.
- Made of 2 folds in overthickness on the 2 opposite sides.



### 2 - CHARACTERISTICS

REFERENCE	WIDTH mm	BRAID WEIGHT g/m	SIDES WEIGHT g/m	TOTAL WEIGHT g/m	BREAKING RESISTANCE daN	LENGTH PER BOBBIN m
SV 23	7	10	2.5	12.5	200	500
SV 24	10	15	2.5	17.5	250	400
SV 16	12	16	2.5	18.5	300	400
SV 17	15	20	2.5	22.5	350	400
SV 21	18	22	2.5	24.5	400	300
SV 18	20	35	2.5	37.5	500	200
SV 19	25	47	2.5	49.5	600	125
SV 20	30	61	2.5	63.5	950	200


- Thickness in the center : 1.0 mm + - 0.3 mm
- On the Fold : 1.3 mm + - 0.3 mm.
- Width : ± 1.0 mm Width ≤ 15 mm -- ± 2.0 mm Width > 15 mm (Flat without tension).

### 3 - APPLICATIONS

- In the bottom of slots.
- between flat copper parts for filling and holding bars and bobbins in the motors.

### 4 - PRESENTATION

- Standard widths : refer to the chart above.
- other widths: please question us.
- Colour : white.
- Length per bobbin : refer to the chart above.

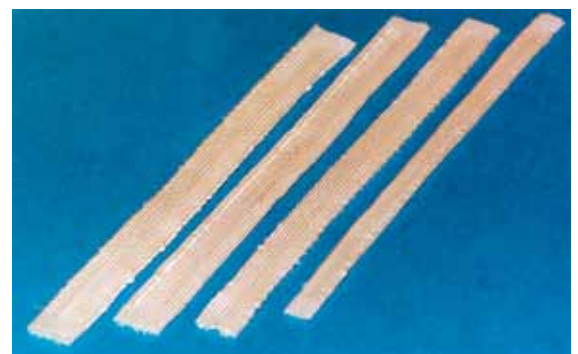

We recommend to protect them from dust, humidity, at an ambient temperature.